


Pad printer in touch screen positioning

PAD PRINTING MACHINE

MODUL 150

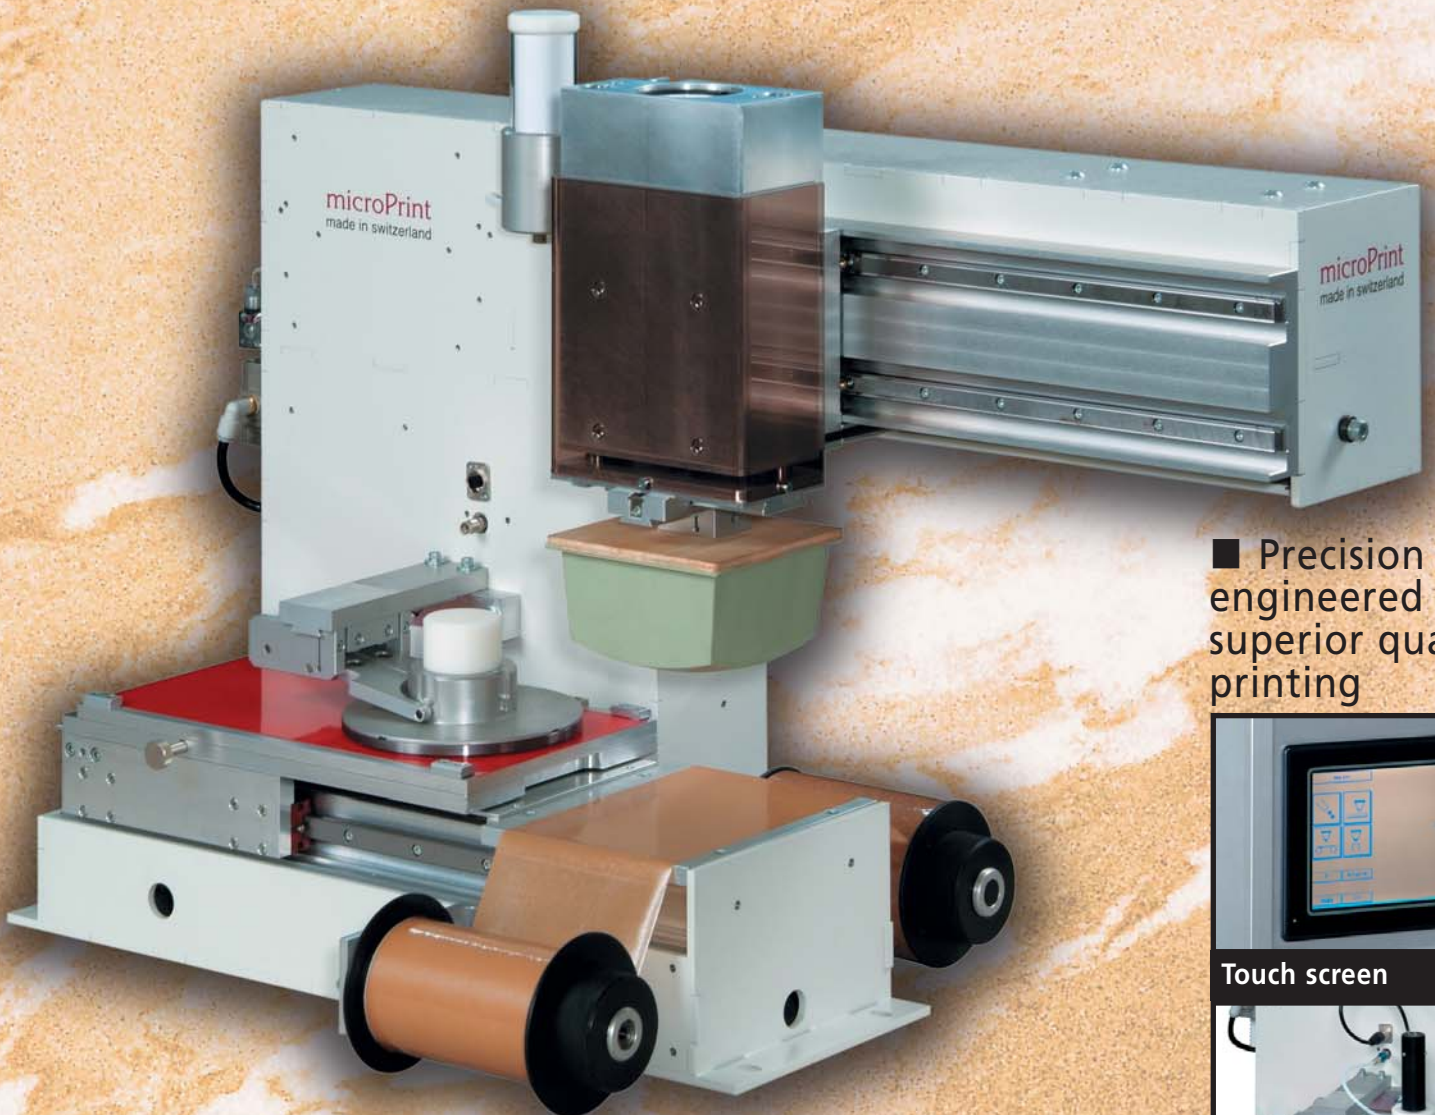

■ Precision engineered for superior quality printing



Touch screen



Closed cup system

- Easy positioning of print layout via touch screen
- Options: profibus connection
- Fully-automatic ink viscosity control (optional)
- Built with first class components for long life
- Worldwide Service and Support



microPrint
SWITZERLAND

Pad printer in touch screen positioning

PAD PRINTING MACHINE
MODUL 150

The MODUL 150 is a compact and robust padprinting machine that has been fine-tuned for performance. The Module 150 is completely operated via the touch screen. All parameter, including layout position can be arranged by the simple touch of a finger tip (+ - 0,01 mm). With the help

of an optional profibus a superior system can combine and control several machines.

Worldwide service


All microPrint machines come complete with our worldwide customer service network and are backed with a



Technical data

Printing capacity:	up to 1800 / hr
Drive:	pneumatic
Printing force:	max. 1750 N
Compressed air supply:	5-6 bar (87 psi)
Air consumption:	3 l/cycle
Control system:	PLC
Main voltage:	110 – 240 V 50–60Hz.
Control voltage:	24 VDC
Weight Module:	90 kg.
Dimensions:	see illustration
Plate size:	
Closed System:	max.180 x 360 mm
Platethickness:	0.5 or 10 mm
Cup size Ø: 1x 140 mm	Print Ø: 1x 130 mm
Cup size Ø: 1x 160 mm	Print Ø: 1x 150 mm

also available with open inkwell upon special request

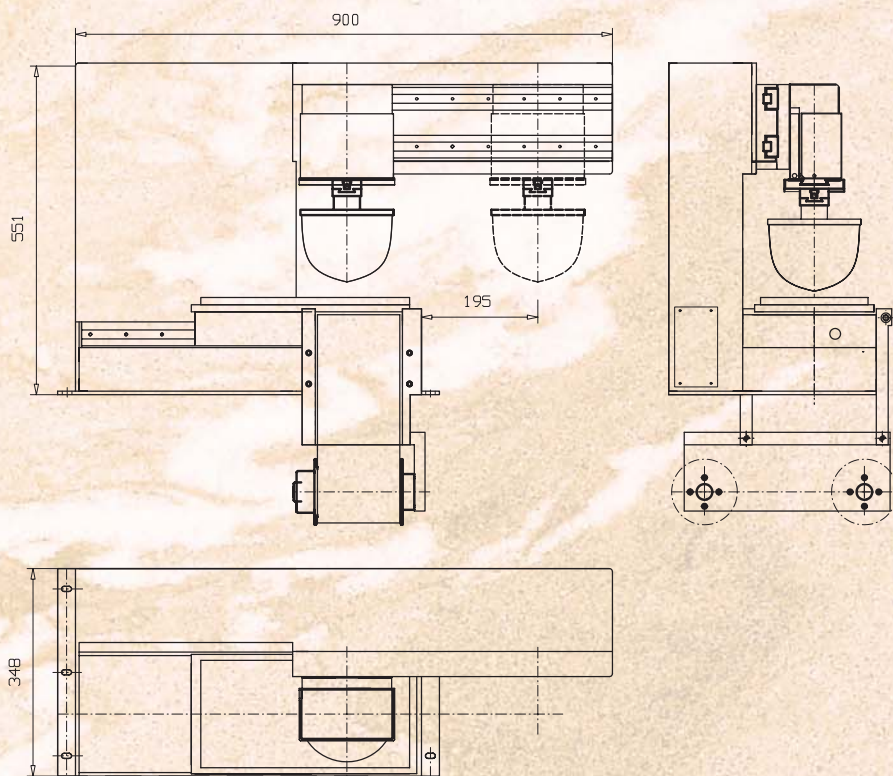

Info

We keep you informed with our home page <http://www.microprint.ch> about our newest developments. You will also find useful information about padprinting.



microPrint
SWITZERLAND

microPrint LC GmbH
Mühlentalstrasse 184
CH-8200 Schaffhausen
Switzerland
Phone: + 41 (0) 52 624 50 59
Fax: + 41 (0) 52 624 50 22
E-mail: info@microprint.ch
[http:// www.microprint.ch](http://www.microprint.ch)